


SedCatch® Sediment Basket™ - Combination Grate & Curb Inlet

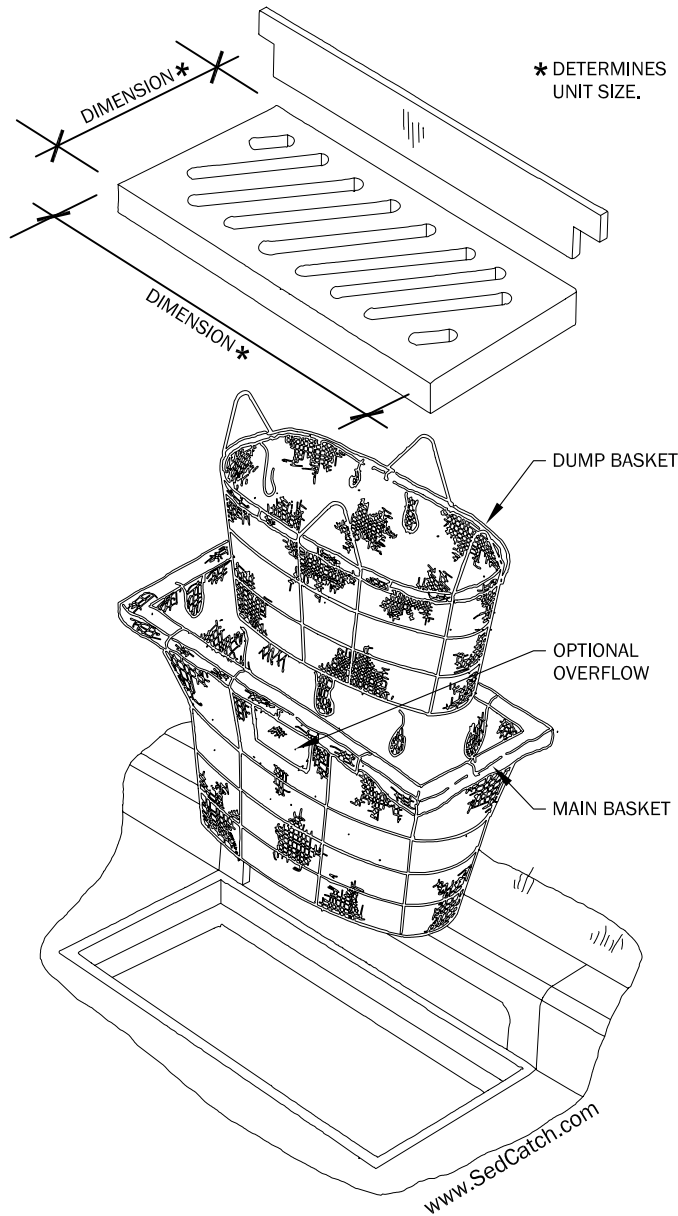

SIZING INSTRUCTIONS:

MEASURE THE ACTUAL SIZE OF THE GRATE; NOTE ANY OBSTRUCTIONS THAT COULD INTERFERE WITH THE SEDCATCH® SEDIMENT BASKET™.

INSTALLATION INSTRUCTIONS:

1. REMOVE GRATE.
2. PLACE MAIN BASKET ON THE LIP OF THE STORM SEWER.
3. PLACE DUMP BASKET™ IN THE MAIN BASKET.
4. REPLACE GRATE.

MAINTENANCE INSTRUCTIONS:

1. INSPECT AFTER EACH RAIN OR AS DIRECTED BY ENGINEER/INSPECTOR.
2. IF SEDCATCH® DUMP BASKET™ CONTAINS SEDIMENT:
 - REMOVE GRATE.
 - LIFT THE DUMP BASKET™ OUT OF THE MAIN BASKET AND DISPOSE OF CONTENTS IN A SUITABLE LOCATION.
 - REPLACE THE DUMP BASKET™.
 - REPLACE GRATE.
3. AFTER APPROXIMATELY 10-20 DUMPS, OR AS NEEDED, REMOVE SEDIMENT THAT HAS FOUND ITS WAY AROUND THE DUMP BASKET™ THAT IS RESTING IN THE BOTTOM OF THE MAIN BASKET.
 - WHILE THE DUMP BASKET™ HAS BEEN REMOVED, LIFT OUT THE MAIN BASKET.
 - DISPOSE OF THE CONTENTS IN A SUITABLE LOCATION.
 - REPLACE MAIN BASKET ON STORM SEWER FRAME LIP.
 - PLACE DUMP BASKET™ IN MAIN BASKET.
 - REPLACE GRATE.

ADVANTAGES:

- SEDIMENT IS COLLECTED IN CONVENIENT DUMP BASKET™.
- NO EQUIPMENT NEEDED TO REMOVE SEDIMENT.
- LONG LIFE, WELDED WIRE BASKET IS STRONGER THAN FABRIC ALONE.
- IT IS NOT DEPENDENT UPON THE STRENGTH OF FABRIC OR THE NECESSARY SEAMS TO PROVIDE SUPPORT.
- THE FABRIC IS NOT AS SUSCEPTIBLE TO DAMAGE FROM EMPTYING; THE 2 PIECE DESIGN VIRTUALLY ELIMINATES THE ABRASION, PULLING, AND TEARING WHILE EMPTYING SEDIMENT.

SedCatch® Environmental Products

www.SedCatch.com

PATENT PENDING

SEDCATCH® SEDIMENT BASKET™ NOTES

1. SEDCATCH® SEDIMENT BASKET™ SHOULD BE INSTALLED AT THE TIME THE STRUCTURE IS SET TO KEEP JOB IN COMPLIANCE.
2. SEDCATCH® SEDIMENT BASKET™ SHOULD BE INSPECTED AFTER EACH RAIN EVENT OR AS DIRECTED BY THE ENGINEER/INSPECTOR.